



**(43) International Publication Date**  
**27 January 2005 (27.01.2005)**

**PCT**

**(10) International Publication Number**  
**WO 2005/008196 A2**

**(51) International Patent Classification<sup>7</sup>:**

**G01J**

**(81) Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**(21) International Application Number:**

PCT/TB2004/051196

**(22) International Filing Date:** 12 July 2004 (12.07.2004)

(25) **Filing Language:** English

(26) **Publication Language:** English

**(30) Priority Data:**

03102249.4

22 July 2003 (22.07.2003) EP

EP

**(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).**

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(72) Inventors; and**

(75) **Inventors/Applicants (for US only):** **BUIJ, Arnold, W.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **MANDERS, Karel, L.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


**Published:**

— without international search report and to be republished upon receipt of that report

(74) Agent: BOSMA, Rudolphus, H., A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(54) Title: METHOD AND DEVICE FOR MEASURING COLOR TEMPERATURE**

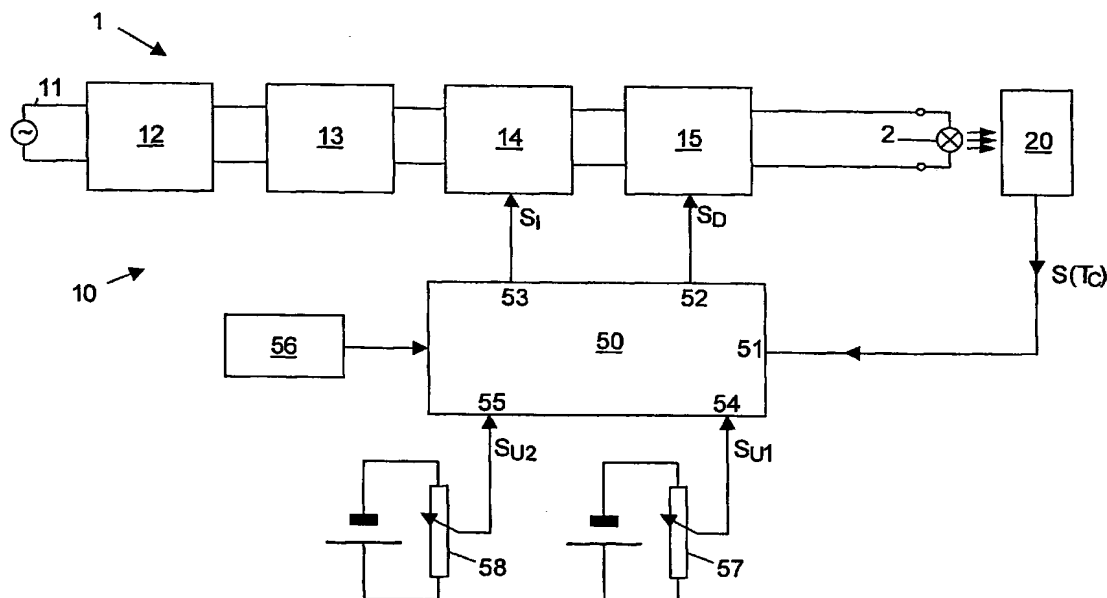

(57) **Abstract:** A method for measuring a color temperature (TC) of a light source (2) comprises the steps of: measuring the partial intensity of one predefined blue spectral component (B); measuring the luminance (V); and calculating the quotient BN as representing the color temperature (TC). The color temperature (TC) is calculated on the basis of a predetermined relationship between the color temperature (TC) and the quotient BN.

**WO 2005/008196 A2**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number  
**WO 2005/008196 A3**

- (51) International Patent Classification<sup>7</sup>: **G01J 5/60**, 1/14, 1/42
- (21) International Application Number: PCT/IB2004/051196
- (22) International Filing Date: 12 July 2004 (12.07.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
03102249.4 22 July 2003 (22.07.2003) EP
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BUIJ, Arnold, W.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **MANDERS, Karel, L.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: **BOSMA, Rudolphus, H., A.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- (88) Date of publication of the international search report:  
12 May 2005
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR MEASURING COLOR TEMPERATURE

(57) Abstract: A method for measuring a color temperature (TC) of a light source (2) comprises the steps of: measuring the partial intensity of one predefined blue spectral component (B); measuring the luminance (V); and calculating the quotient BN as representing the color temperature (TC). The color temperature (TC) is calculated on the basis of a predetermined relationship between the color temperature (TC) and the quotient BN. Sensor assembly capable of generating a measuring signal containing information regarding the color temperature of a light source. Switch stage for cooperation with a sensor assembly. Driver for during a lamp with variable color temperature properties. Lamp system comprising a lamp, a sensor assembly and a lamp driver.



WO 2005/008196 A3